


## Hydraulic Impact Hammer HHx250

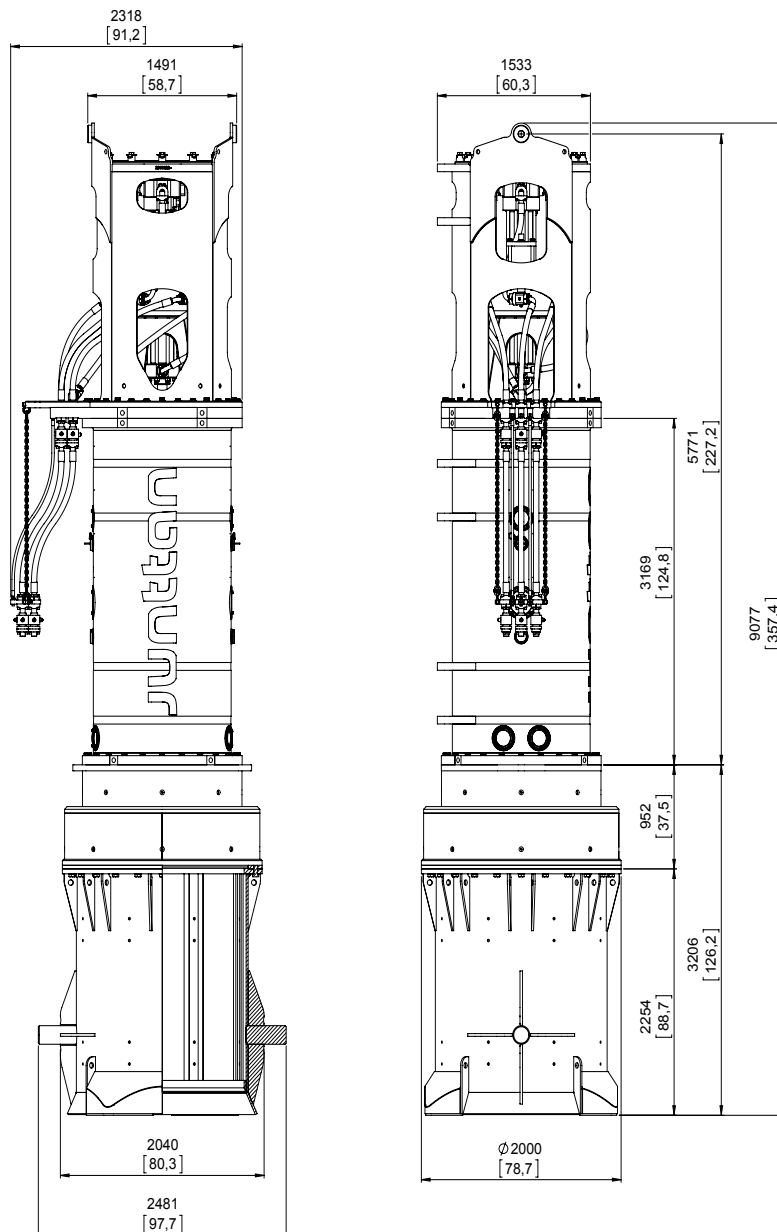

## JUNTTAN HHx250

Max. energy		250 kNm	184 250 ft-lb
Max drop height		1 m	3.28 ft
Blows per minute		60 - 120	60 - 120
Ram weight		16 000 kg	35 200 lb
Total weight	including A-type drive cap	33 600 kg	74 000 lb
Oil flow		785 l/min	207 gpm
Operating pressure		200 bar	2 901 psi
Hoses			
	- pressure line	3 x 38 mm	3 x 1 ½ inch
	- return line	3 x 38 mm	3 x 1 ½ inch
Drive cap housing (std)	Ø:	1 720 mm	67.7 inch
Drive cap types	A-type:	for metal tubes	for metal tubes
	B-type:	for concrete piles	for concrete piles
Max pile	A-type:	Ø 1 600 mm	63.0 inch
	B-type:	□ by special request	by special request
Larger drive cap diameters available up to 2 400 o.d. piles			
Suitable Powerpacks		20xCU	20xCU

## Accessories

* Guide claws			* Lifting cat
* Extensions			* Flying leader
* Energy measurement device			* Additional noise insulation package
* Additional drive caps			* Powerpacks
* Pile sleeves			

## Special features

- \* Pile cruise
- \* Hammer pilot
- \* Damage prevention system
- \* Peak energy mode
- \* Concrete pile mode

**JUNTTAN**

**Junttan Oy**  
P.O. Box 1702 (Matkuksentie 7)  
FI-70701 KUOPIO, Finland

[junttan@junttan.com](mailto:junttan@junttan.com)